

Attorney's docket 20784

Box Patent Application
Commissioner of Patents and Trademarks
Washington, DC 20231

JC523 U.S. PTO
09/189363



PATENT

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of inventor:

	First Name	Last Name	Residence	Citizenship
1.	Gerhard	FILDAN	Vienna, Austria	Austria

address: Wohnpark Alte Erlaa, Anton Baumgartner Str. 44, C 4 17 01, A-1232 Vienna, Austria

For (title):

FRONT CLOSURE FOR A BRASSIERE

1. Type of Application

- ☒ Utility
- ☐ Design
- ☐ Plant

- ☐ Original
- ☐ Divisional
- ☐ Continuation
- ☐ Continuation-in-part (CIP)

EL130392379

NOV - 9 1998

2. Benefit of Prior US Application(s) (35 USC 120) or foreign priority (35 USC 119)

- ☐ The new application being transmitted claims the benefit of a prior US application.
- ☐ Foreign priority claimed (see ¶9)

3. Papers Enclosed Required For Filing Date Under 37 CFR 1.53(b) (Uti.) or 37 CFR 1.153 (Des.)

- ☒ Pages of specification (13)
- ☒ Pages of claims (7)
- ☒ Pages of Abstract (1)
- ☒ Sheets of Drawing (5)
 - ☐ Formal
 - ☒ Informal

4. Additional papers enclosed

- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement
- ☐ PTO-1449
- ☐ Citations (none)
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing," computer-readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino-acid sequence
- ☐ Authorization of Attorney(s) to accept and follow instructions from Representative
- ☐ Other

5. Declaration or Oath

- ☐ Enclosed
original executed by
 - ☐ Inventor(s)
 - ☐ legal representative of inventor(s). 37 CFR 1.42 or 1.43
 - ☐ joint inventor or person showing a proprietary interest on behalf of inventor who refused to sign or could not be reached
 - ☐ this is the petition required by 37 CFR 1.47 and the statement required by 37 CFR 1.47 is also attached
- ☒ Not Enclosed
 - ☒ Application is made by a person authorized under 37 CFR 1.41(c) on behalf of all the above-named inventor(s).
 - ☐ Showing that the filing is authorized.

6. Inventorship Statement

The inventorship for all the claims in this application is:

- ☒ The same
- ☐ Not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made
 - ☐ is submitted.
 - ☐ will be submitted.

7. Language

- ☒ English
- ☐ non-English
- ☐ the attached translation is a verified translation. 37 CFR 1.52(d).

8. Assignment

- ☒ This application is not currently assigned.

9. Certified Copy

Certified copy of application

Country

Number

Date

from which priority is claimed

- ☐ is(are) attached.
☐ will follow.

10. Fee calculation☒ **A. Utility application**

CLAIMS AS FILED

	No. Filed	Base No.	No. Extra	Rate	Basic fee
Total claims	22	20	2	\$22.00	\$790.00
Independent claims	3	3	0	\$82.00	\$44.00
Mult. dep. claims	No	n/a	n/a	\$270.00	\$0.00

- ☐ Amendment canceling extra claims enclosed.
☐ Amendment canceling multiply dependent claims enclosed.
☐ Fee for extra claims is not being paid at this time.
 Filing Fee Calculation \$834.00
- ☐ **B. Design application**
 (\$0.00--37 CFR 1.16(f))
 Filing fee calculation \$00.00
- ☐ **C. Plant application**
 (\$490.00--37 CFR 1.16(g))
 Filing fee calculation \$00.00

11. Small Entity Statement(s)

- ☐ Verified Statement(s) that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is(are) attached
 Filing fee calculation (50% of A, B, or C above)

12. Request for International-Type Search (37 CFR 1.104(d))

- ☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

13. Fee Payment

- ☒ Not enclosed.
- ☒ No filing fee is to be paid at this time.
- ☐ Enclosed.
- | | |
|---|---------------|
| <input type="checkbox"/> basic filing fee | \$0.00 |
| <input type="checkbox"/> petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or could not be reached | \$0.00 |
| <input type="checkbox"/> for processing an application with a specification in a non-English language | \$0.00 |
| <input type="checkbox"/> processing and retention fee | \$0.00 |
| <input type="checkbox"/> fee for international-type search report | \$0.00 |
| Total fees enclosed | \$0.00 |

14. Method of Payment of Fees

- ☐ Check in the amount of \$0.00
- ☐ Charge Account 18-2025 for \$0.00. A duplicate of this form is attached.

15. Authorization to Charge Additional Fees


- ☐ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to account 18-2025.
- ☐ 37 CFR 1.16(a), (f), or (g) (filing fees)
- ☐ 37 CFR 1.16(b), (c), or (d) (extra claims)
- ☐ 37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)
- ☐ 37 CFR 1.17 (application processing fees)
- ☐ 37 CFR 1.18 (issue fee at or before mailing of Notice of Allowance pursuant to 37 CFR 1.31(b))

16. Instructions As To Overpayment

- ☐ credit account 18-2025
- ☐ refund

6 November 1998

The Firm of Karl F. Ross P.C.



Herbert Dubno, reg. no. 19,752

Customer Number 000535
 5676 Riverdale Avenue Box 900
 Riverdale (Bronx), NY 10471-0900
 Tel: (718) 884-6600
 Fax: (718) 601-1099
 lb

FRONT CLOSURE FOR A BRASSIERE

SPECIFICATION

FIELD OF THE INVENTION

5 My present invention relates to a front closure for a brassiere and to a brassiere provided with the improved front closure. More particularly the invention relates to a brassiere having a pair of fabric cups and a closure interconnecting the cups at the front of the brassiere.

BACKGROUND OF THE INVENTION

10 While brassieres are available in a large number of configurations and designs, most of them permanently interconnect cups of the brassiere at the front thereof and provide a rear closure of the hook-and-eye or other type of connecting rear straps of the garment. The brassiere can be provided with
15 shoulder straps which are adjustable and, in the case of maternity brassieres, can have special fittings enabling one or the other cup to be lowered to expose the breast for nursing purposes. For many women manipulation of a back closure is difficult and hence, for arthritics, the convenience of a front
20 closure is significant.

In an earlier front closure for a brassiere, a male member was fitted into a female member by longitudinally sliding a bar of the male member practically over its entire length into

a channel provided in the female member. The result of this sliding action enabled the two members to be locked relative to one another by swinging the two members about an axis of the bar into a locked position in which the two members could not be separated.

For ease of manipulation, particularly by women with arthritic conditions, and for some brassiere designs in which the fabric pieces at the front of the brassiere are relatively wide, the closure must be comparatively long and any interfitting of the male and female members with the need to displace the male member into the channel over practically the full height or length of the closure, made connection of the two closure parts difficult. Indeed, closures of that type could not readily be transformed into long or high closures without running the risk that manipulation would be difficult.

OBJECTS OF THE INVENTION

It is, therefore, the principal object of the invention to provide a relatively tall or long separable closure, particularly for use as the front closure of a brassiere, whereby these drawbacks can be avoided.

Another object of this invention is to provide a front closure for a brassiere which can be readily manipulated by an individual with manipulation difficulty, especially an arthritic condition, but yet which will be aesthetic in appearance and secure and reliable in use.

Still another object of this invention is to provide a front closure in which the male member can readily be fitted into and secured in the female member but wherein the stroke with which the male member must be moved relative to the female member is reduced by comparison with earlier systems.

Still another object of this invention is to provide an improved closure for the purposes described which can be fabricated relatively simply.

SUMMARY OF THE INVENTION

These objects and others which will become apparent hereinafter are attained, in accordance with the invention in a front closure for a brassiere which is less likely to unintentionally open by comparison with earlier closures and wherein male and female members are interconnected so that a bar of the male member can be inserted into the female member and rotated therein so as to lock the member in place. Important to this invention is a detent located substantially midway along the length of the bar and which resiliently secures the male member in its outwardly swung position, i.e. a position in which the two members are substantially coplanar.

I can provide a two-color system in which the frame members are of one color and can be used either as part of a female member of another color by bonding the male member to that female member, or as a movable male member removably inserted

into that female member. Alternatively, the fixed frame portion may be part of the female member.

In another aspect of the invention, the male and female closure members may be interfitted by an axial movement of the bar of the male member into the channel or trough of the female member with a stroke or displacement with only a small fraction of the length of the bar or, in the case of another embodiment, with no axial or longitudinal displacement at all. Longitudinal displacements which are practically the full length of the bar as were known from the prior art, can therefore be avoided.

More specifically, a closure for a garment can comprise a one-piece molded male closure member having an elongated first frame formed from a pair of parallel limbs connected by bights at opposite ends and surrounding an elongated slot whereby a first garment part is adapted to be looped around one of the limbs through the slot, a bar spaced from and parallel to the other of the limbs, and a pair of webs spaced inwardly from opposite ends of the bar and from one another connecting the bar with the other of the limbs, the first frame, the bar and the webs lying in a first plane;

a one-piece molded female closure member having an elongated second frame formed from a pair of parallel limbs connected by bights at opposite ends and surrounding an elongated slot whereby a second garment part is adapted to be looped around one of the limbs of the second frame and through the slot thereof, a trough formed on the other of the limbs of the second

frame, lying in a second plane therewith and adapted to receive the bar in a position of the male member such that the first plane is substantially perpendicular to the second plane, the troughs having cutouts accommodating the webs upon; and

5 detent means on at least one of the closure members between the webs and the cutouts for resiliently retaining the closure members in their coplanar positions.

A brassiere provided with that closure has each of the fabric cups connected to one of the aforementioned frames.

10 The bar can be round or polygonal, preferably the trough is open laterally over a major portion of the length of the bar and opens longitudinally into a sleeve of a length corresponding to a remaining portion of the length of the bar whereby the bar must be shifted longitudinally in the trough into
15 the sleeve to permit the rotation of the male closure member relative to the female closure member about the axis of the bar to render the closure members coplanar.

20 With that system the sleeve can be formed with a hole opening longitudinally away from the trough, the hole being formed by a pin during the molding operation. In practice it has been found that prior art systems in which the bar was required to move through practically its entire length into the channel of the female member, required a significantly longer pin in
25 relative terms, i.e. relative to the length of the bar or channel, so that such fabrication methods were not practical for long or high closures.

The female part, i.e. the trough or channel, can be closed at one or both of its ends.

According to a further feature of the invention, the female member can have a flange which covers webs of the male member and thus provides the closure with a more aesthetic appearance from the front.

BRIEF DESCRIPTION OF THE DRAWING

The above and other objects, features, and advantages will become more readily apparent from the following description, reference being made to the accompanying drawing in which:

FIG. 1 is a fragmentary elevational view of a portion of a brassiere provided with a front closure according to the invention;

FIG. 2 is an elevational view of the male member of that closure;

FIG. 3 is a cross sectional view taken along the line III-III of FIG. 2;

FIG. 4 is an end view of that male member;

FIG. 5 is a side view of the male member;

FIG. 6 is an elevational view of the female member;

FIG. 7 is a rear view of the female member;

FIG. 8 is a cross sectional view taken along the line VIII-VIII of FIG. 6;

FIG. 9 is a side view of the female member;

FIG. 10 is a front elevational view of another closure according to the invention;

FIG. 11 is a rear view thereof;

FIG. 12 is a cross sectional view taken along line XII-
5 XII of FIG. 11;

FIG. 13 is an elevational view of still another embodiment of a front closure according to the invention;

FIG. 14 is rear view of this embodiment; and

FIG. 15 is a cross sectional view taken along line XV-
10 XV of FIG. 14.

FIG. 16 is an elevational view of a brassiere front closure according to another embodiment of the invention;

FIG. 17 is a rear view of the female member of that closure;

FIG. 18 is an elevational view of the male member
15 separated from the female member;

FIG. 19 is a cross sectional view through the female member taken along the line XIX-XIX of FIG. 17;

FIG. 20 is a cross sectional view taken along the line
20 X-X of FIG. 17;

FIG. 21 is a perspective view drawn to a smaller scale showing the insertion of the male member into the female member for the closure of FIGS. 16-20;

FIG. 22 is a view similar to FIG. 16 of another
25 embodiment of the front closure according to the invention;

FIG. 23 is a section taken along the line XXIII-XXIII of FIG. 22;

FIG. 24 is an elevational view of the loop of a closure similar to that of FIG. 22 but with a modified shape of the bulge;

FIG. 25 is an elevational view showing another bulge shape; and

FIG. 26 is a view similar to FIG. 1 showing another approach to the attachment of the front closure to the brassiere.

SPECIFIC DESCRIPTION

Referring first to FIG. 1, which shows a front closure brassiere, it can be seen that the brassiere 10 comprises two cups 11 and 12 which are joined at the front by a front closure 13 comprising a female member 14 and a male member 15. The brassiere is shoulder straps, one of which is visible at 16, and a back strap 17. The male member 15 of the closure can comprise a frame 20 having a slot 21 through which the fabric strip 22 of one brassiere cup is passed, so that that fabric strip is looped on limb 23 of the frame 20.

The frame 20 also comprises a limb 24 connected to the limb 23 by a pair of bights 25 and 26. The frame 20 lies in a plane P (see FIG. 4).

In addition, the male closure member 15 comprises a bar 26 connected by webs 27 to the limb 24. The male closure member is injection molded in one piece. The ends of the bar 26 are

rounded at 28 and the bar can have a polygonal cross section, i.e. can be provided with flat surfaces 30 as shown in FIG. 3.

The female member 14 of the closure can comprise a frame 31 having a limb 32 defining a slot 33 with a limb 34, another fabric portion 35 of the brassiere being looped around the limb 32 and passing through the slot 33 on the back of the female closure member 14, a trough 36 is formed between a rib 37 of the limb 34 and a rib 38, the rib 37 being cut away at 39 and 40 to accommodate the webs 27. To create a detent, the rib 37 is provided with an inwardly-extending projection 41 while the rib 34 is formed with the projection 42, overhanging the bar 26 when the latter is inserted into the trough 36. The width W of the bar 26 is equal to the width W between the formations 41 and 42 and is less than the dimension S of the bar in plane P. The female member lies generally in the plane P' shown in FIG. 8. In addition, the female member can have a flange 43 which can cover the webs 27 when the male member is inserted into the female member.

In operation, the bar 26 of the male member is inserted into the trough 36 in the direction of arrow 45, whereupon the male member is swung counterclockwise in the position shown in FIG. 8 to lock the bar 26 under the projections 41, 42. A longitudinal movement along the bar 26 is here not required.

In the embodiment of FIG. 10, the front closure 50 has a decorative shield 51 forming part of the female member 52. The latter can have a frame 53 and can be provided with a slot 54

5 accommodating the bar 55 of a male member 56 which is also of
frame-like construction at 57. The width of the bar 55 is such
that the latter can be easily inserted into slot 54 when the male
member is turned transversely to the female member and then can
be locked beneath the projections 58 and 59 adjoining the slot
54. In addition, the frame 57 can carry a transverse strut 60
which can lock into another slot 61 when the male and female
members are swung into coplanarity in the position shown in FIG.
12. Since the frame 53 is formed unitarily with the decorative
shield 51, it is of the same color as that of the shield. In
this case it is advantageous aesthetically to make the male
member 56 of the same color as well.

10
15 In the embodiment of FIGS. 13-15, the frame members 61
and 62 are identical and each bar 63, 64 is received in a
respective slot 65, 66 overhanging the respective bar. The
members 61 and 62 are frames whose struts 67 and 68 pass into
additional slots 69 and 70 of the female member.

20 In practice, one of the frame parts 61 or 62 is
inserted into the female member and then permanently affixed
thereto by a drop of an adhesive or by thermal fusion. The other
frame member 62 or 61 can then be removably inserted in the
manner described to provide a detachable front closure. The
fabric of the cups of the brassiere can be secured to the frame
members 61 and 62 in the usual manner.

25 While the configurations in FIGS. 10 and 13 are the
same, since the frame members 61 and 62 are fabricated separately

from the female member 69, the shield 69 can be made of one color while the frame members 61, 62 are composed of another color.

The front closure 71 for the brassiere shown in FIG. 16 can comprise a male member 72 (FIG. 18) of the type that has
5 already been described and a female member 73 which differs from that previously described as will be developed below (FIG. 17).

The male member 72 comprises the frame 74 connected with the bar 75 by the webs 76 while the female member 73 has a frame 77 which is formed on a frame limb 78 with a trough or
10 channel 79 overhanging by the formations 80 and 81 forming a detent which locks the two members in their coplanar positions as has been described previously.

In this embodiment the channel 79 is open longitudinally at one end but is formed with a sleeve or closed
15 portion 82 at the opposite end. The sleeve 82 is formed with a hole 83 through which a pin can extend during the molding process.

In practice, the bar 75 (FIG. 21) can be inserted into the channel in a direction transverse to the plane of the female
20 member, i.e. in the direction of arrow 85 (FIG. 21) and then slid downwardly along with a channel (arrow 86) until the end of the pin 75 is engaged in the sleeve 82. Then the male member can be rotated about the axis 87 of the bar (in the counterclockwise sense represented by the arrow 88 in FIG. 21) to lock the bar in
25 the channel 79. Because the sleeve 82 is of limited axial height and the webs 76 can come to lie in cut-outs 89 of the wall of the

trough (see FIG. 17), the axial displacement 86 need not correspond to the full length of the bar 75. The result is a simple mode of interconnection of the male and female members and ease of locking and unlocking.

5 From FIGS. 22 and 23, it will be apparent that the slots or eyes 94 and 96 of the male member and the female member 93 can be formed with bulges 95 and 97, respectively, which lie inwardly of the ends of the slots, and serve to prevent the fabric in the region of these bulges from pulling away from the central portion of the closure. Without these bulges, when the closure is under stress when the brassiere is worn, there is a tendency of the fabric attached to each of the closure members to pull away and leave a slot clearance in the slot which can be unaesthetic. With the bulges 95 and 97, the fabric remains close to the center portion of the closure.

10 As can be seen from FIG. 24, the bulge 99 may be curved uniformly from one end to the other by contrast with the bulges 95 and 97 which are of substantially uniform thickness except for the ends of the bulge. The bulge 101 for the loop 100 in FIG. 25 has ends which are squared off by comparison with the sloping ends of the bulges 95 and 97. The bulges can be provided over only part of the thickness of the eye or loop and can be shaped asymmetrically as shown for the bulge 95 (FIG. 23) or in the plane of symmetry of the member as shown for the bulge 97 in FIG. 23.

20 25 FIG. 26 shows a system for attaching the fastener 110 to the brassiere cups 115 and 116 via the eyes or loops 111 and

20784

112 by fabric strips 113 and 114 which are gathered in passing through the respective eye or loop.

I CLAIM:

1. A closure for a garment comprising:

a one-piece molded male closure member having an elongated first frame formed from a pair of parallel limbs connected by bights at opposite ends and surrounding an elongated slot whereby a first garment part is adapted to be looped around one of said limbs through said slot, a bar spaced from and parallel to the other of said limbs, and a pair of webs spaced inwardly from opposite ends of said bar and from one another connecting said bar with said other of said limbs, said first frame, said bar and said webs lying in a first plane;

a one-piece molded female closure member having an elongated second frame formed from a pair of parallel limbs connected by bights at opposite ends and surrounding an elongated slot whereby a second garment part is adapted to be looped around one of said limbs of said second frame and through said slot thereof, a trough formed on the other of said limbs of said second frame, lying in a second plane therewith and adapted to receive said bar in a position of said male member such that said first plane is substantially transverse to said second plane, said troughs having cutouts accommodating said webs upon; and

detent means on at least one of said closure members between said webs and said cutouts for resiliently retaining said closure members in their coplanar positions.

1 2. The closure defined in claim 1 wherein said bar is
2 round.

1 3. The closure defined in claim 1 wherein said bar is
2 polygonal.

1 4. The closure defined in claim 1 wherein said trough
2 is open laterally over the entire length of said bar.

1 5. The closure defined in claim 1 wherein said trough
2 is open laterally over a major portion of the length of said bar
3 and opens longitudinally into a sleeve of a length corresponding
4 to a remaining portion of the length of said bar whereby said bar
5 must be shifted longitudinally in said trough into said sleeve to
6 permit said rotation of said male closure member relative to said
7 female closure member about said axis of said bar to render said
8 closure members coplanar.

1 6. The closure defined in claim 5 wherein said sleeve
2 is formed with a hole opening longitudinally away from said
3 trough.

1 7. The closure defined in claim 1 wherein said female
2 member is formed with a flange overlying said webs in said
3 coplanar positions.

4 8. The closure defined in claim 1 wherein said detent
5 means is a lock nose engaging said bar.

1 9. A front-closing brassiere, comprising a brassiere
2 garment having two fabric cup portions and a front closure
3 detachably connecting said cup portions, said front closure
4 including:

5 a one-piece molded male closure member having an
6 elongated first frame formed from a pair of parallel limbs
7 connected by bights at opposite ends and surrounding an elongated
8 slot whereby a one of said cup portions is looped around one of
9 said limbs through said slot, a bar spaced from and parallel to
10 the other of said limbs, and a pair of webs spaced inwardly from
11 opposite ends of said bar and from one another connecting said
12 bar with said other of said limbs, said first frame, said bar and
13 said webs lying in a first plane;

14 a one-piece molded female closure member having an
15 elongated second frame formed from a pair of parallel limbs
16 connected by bights at opposite ends and surrounding an elongated

slot whereby the other of said cup portions is looped around one of said limbs of said second frame and through said slot thereof, a trough formed on the other of said limbs of said second frame, lying in a second plane therewith and adapted to receive said bar in a position of said male member such that said first plane is substantially transverse to said second plane, said troughs having cutouts accommodating said webs upon; and

detent means on at least one of said closure members between said webs and said cutouts for resiliently retaining said closure members in their coplanar positions.

10. The brassiere defined in claim 9 wherein said bar is round.

11. The brassiere defined in claim 9 wherein said bar is polygonal.

12. The brassiere defined in claim 9 wherein said trough is open laterally over the entire length of said bar.

13. The brassiere defined in claim 9 wherein said trough is open laterally over a major portion of the length of

said bar and opens longitudinally into a sleeve of a length corresponding to a remaining portion of the length of said bar whereby said bar must be shifted longitudinally in said trough into said sleeve to permit said rotation of said male closure member relative to said female closure member about said axis of said bar to render said closure members coplanar.

14. The brassier defined in claim 13 wherein said sleeve is formed with a hole opening longitudinally away from said trough.

15. The brassiere defined in claim 9 wherein said female member is formed with a flange overlying said webs in said coplanar positions.

16. The brassiere defined in claim 9 wherein said detent means is a lock nose engaging said bar.

17. A front closure for a brassiere comprising:
a female member having an aesthetic front face and a rear face provided with a channel overhung by opposite flanks;

4 a male member having a frame portion connectable to a
5 fabric portion of one cup of a brassiere and a bar removably
6 receivable in said channel, said bar having a width accommodated
7 between said flanks in a position of said frame portion
8 transverse to said female member and lodged beneath said flanks
9 upon rotation of said frame portion about an axis of said bar
10 into substantial coplanarity with said female member; and

11 means for affixing said female member to a fabric
12 portion of another cup of said brassiere.

1 18. The front closure defined in claim 17 wherein said
2 means for affixing is another frame portion secured to said
3 female member.

1 19. The front closure defined in claim 18 wherein each
2 of said frame portions has a respective bar received in a
3 respective one of said channels, one of said bars being removable
4 from the respective channel and the other of said bars being
5 permanently secured in the respective channel.

1 20. The front closure defined in claim 17 wherein said
2 frame portion has a limb parallel to said bar and resiliently
3 secured in another channel of said female member upon rotation of

4 said frame portion into substantial coplanarity with said female
5 member.






1 21. The front closure defined in claim 9 wherein the
2 cup portions passing through said slots are gathered.




1 22. The front closure defined in claim 9 wherein an
2 outer one of the limits defining each of said slots is formed
3 with a bulge projecting into a respective slot for holding fabric
4 of a respective one of said cup portions close to the other limit
5 of the respective slot even under the development of tension
6 between said cup portions.

ABSTRACT OF THE DISCLOSURE

A front closure for a brassiere has male and female parts which have frame portions through which fabric parts of the respective cups can pass for attaching these cup portions to the closure members. The male member has a bar received in a trough or channel of the female member and is locked in place releasably by a partial rotation of the male member about the axis of the bar. The bar can be inserted at least in part transversely to the channel or trough when the plane of the male member is transverse to the plane of the female member.






ef-

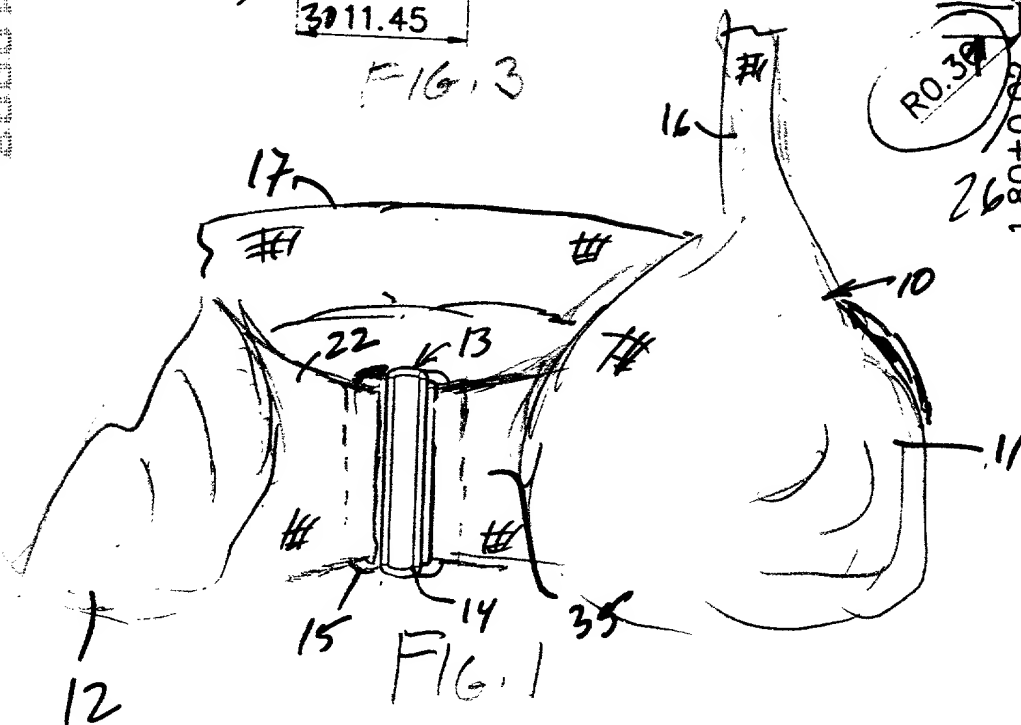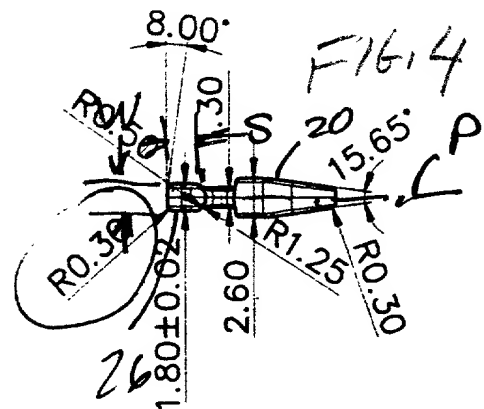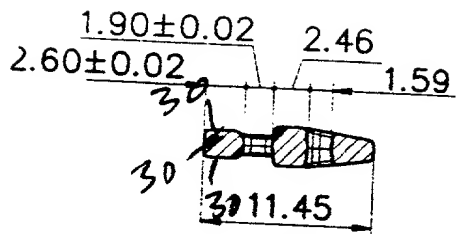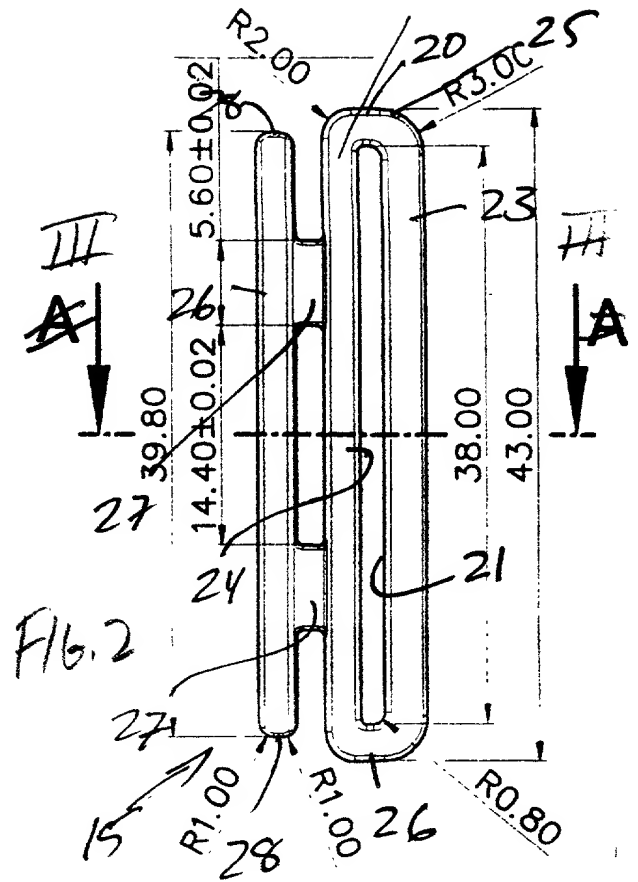
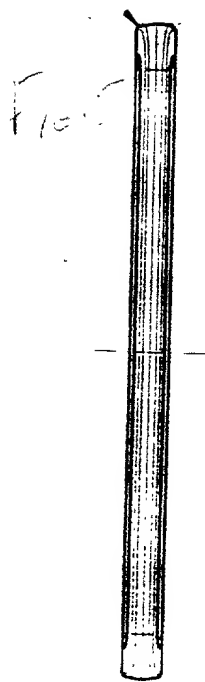


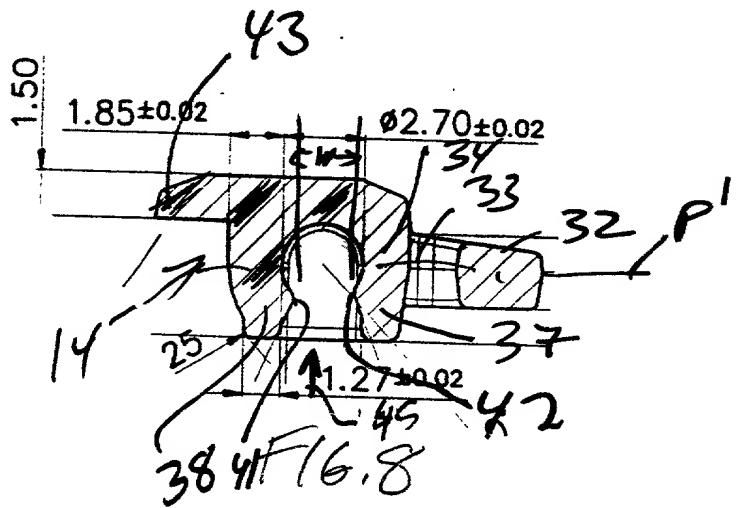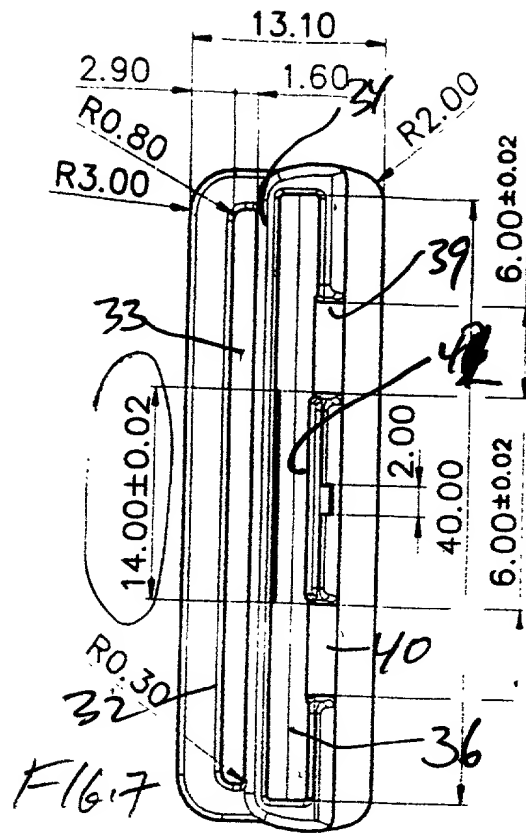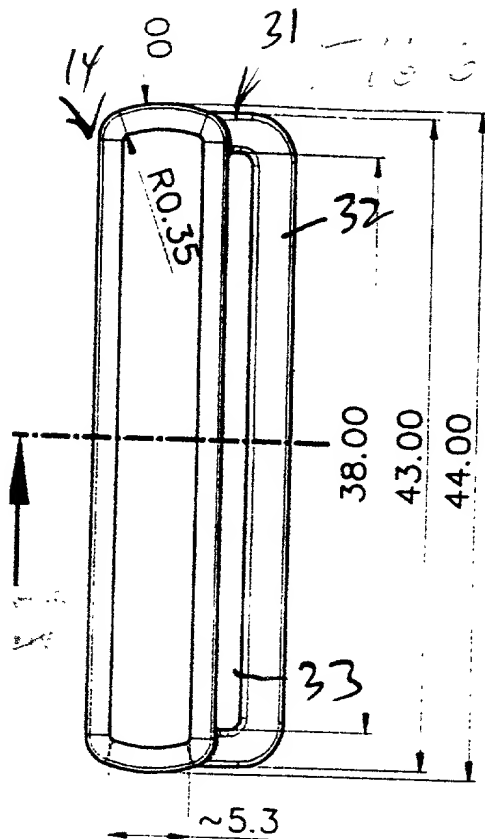

F16.9

A

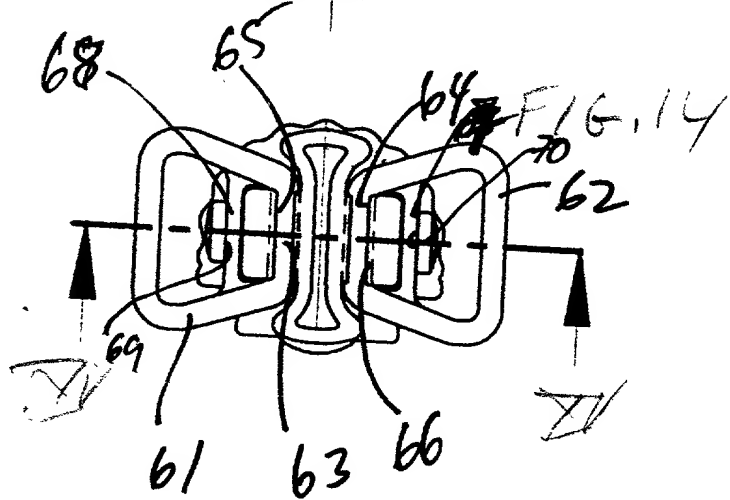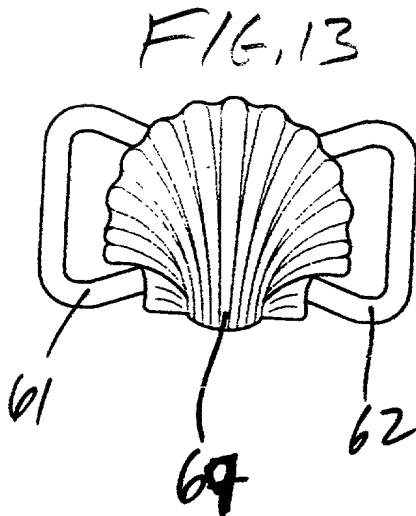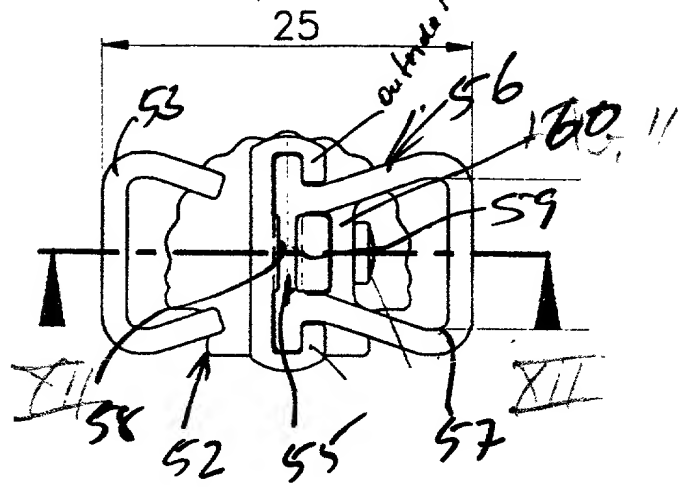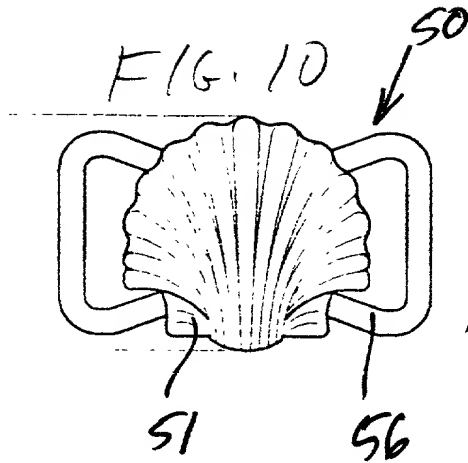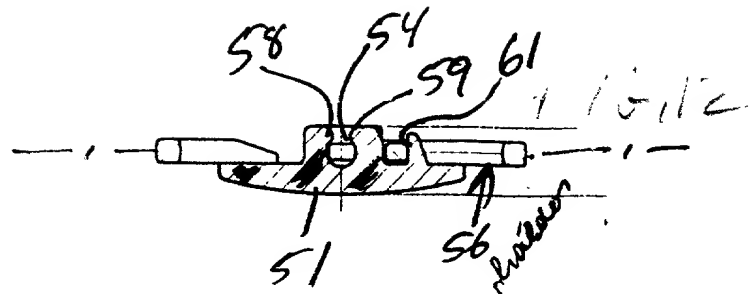

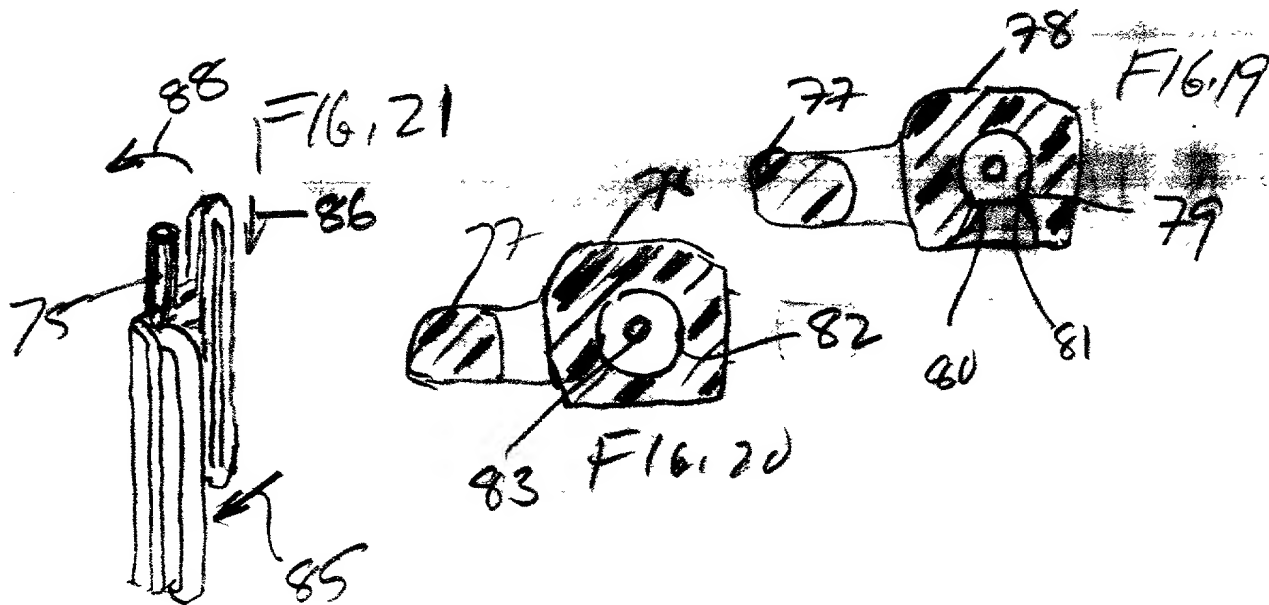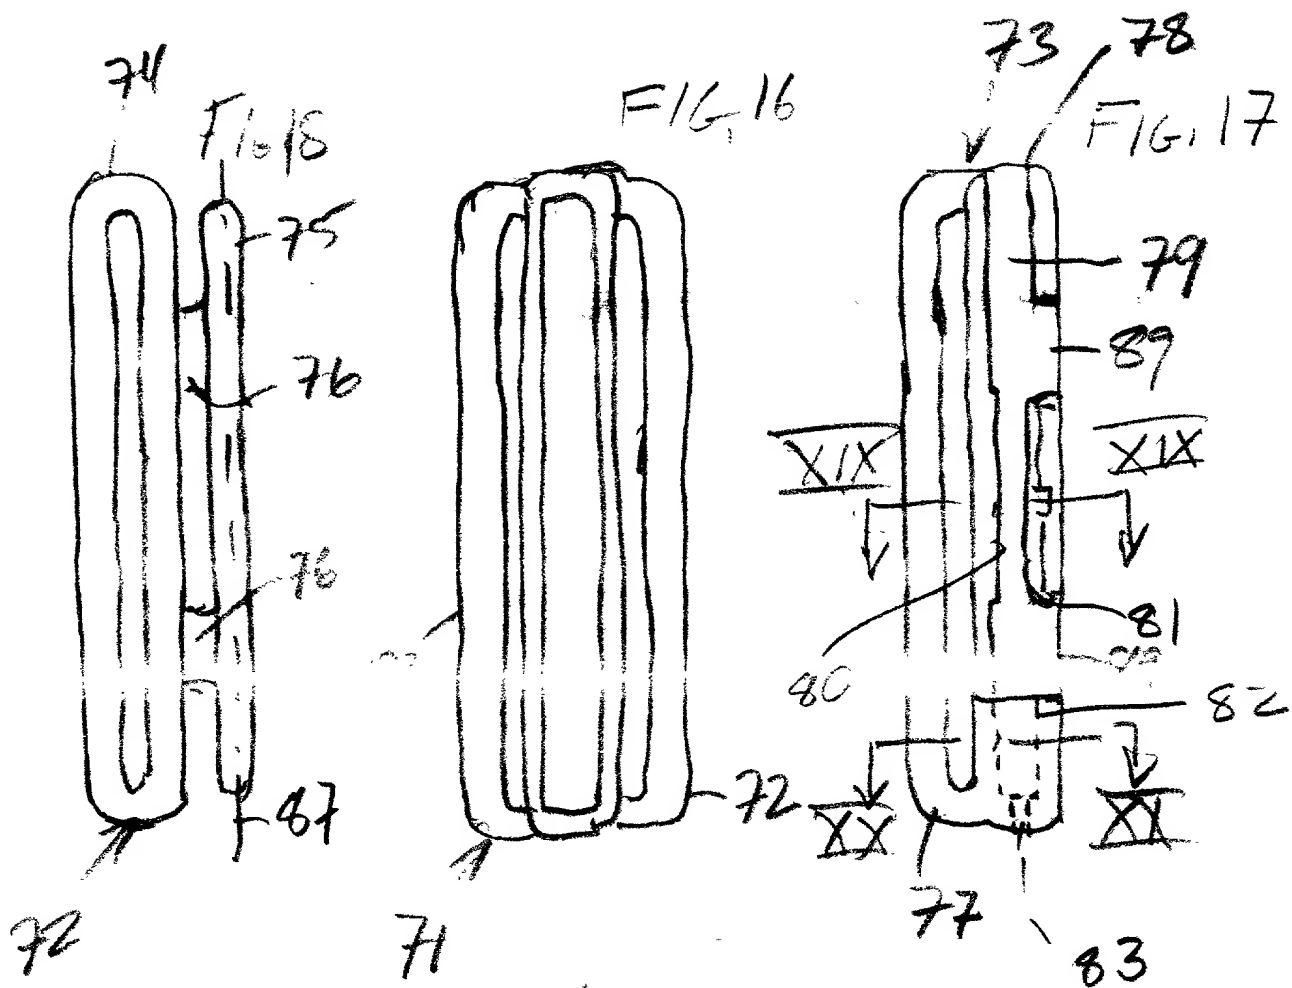

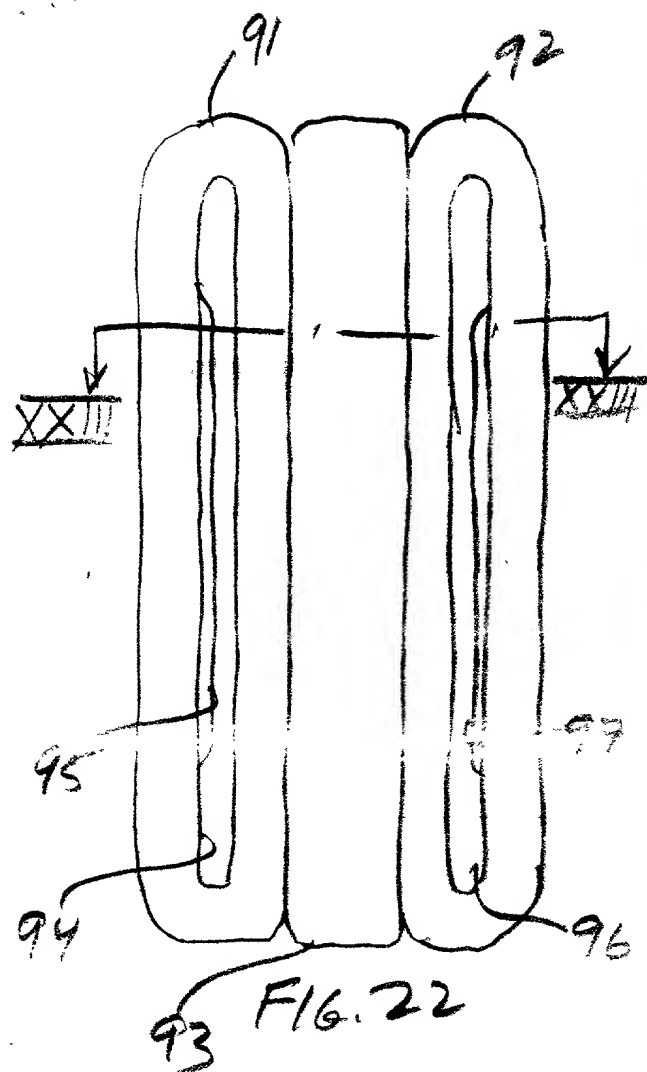


FIG. 24

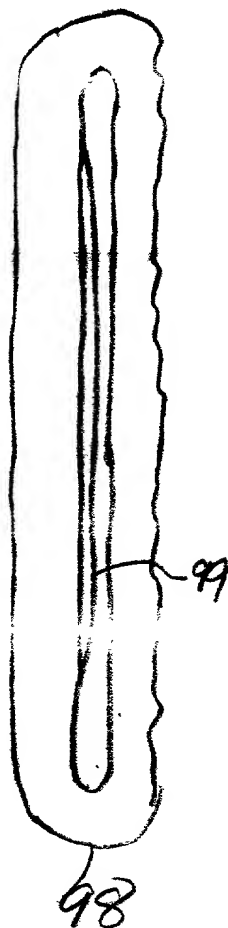


FIG. 25

